


# M860 MULCHER




## APPLICATION VERSATILITY.

The Weiler 624 brushcutter and 825 mulcher are available from the factory and are optimized for the M860. Rugged structures, reinforced skids, and internal abrasion-resistant plating minimize downtime and repairs. All daily service points are at ground level.

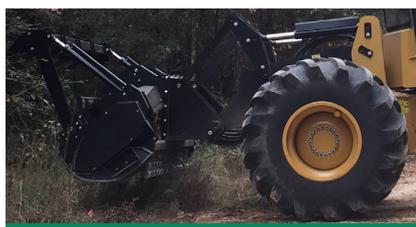

## SERVICEABILITY.

Ground level fuel fill, electric hydraulic oil fill pump, four-sided access to the engine and hydraulic pumps, as well as a tilting cab provide full access to the interior of the machine delivering excellent serviceability.

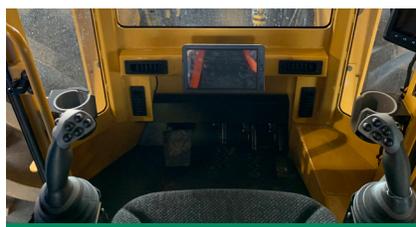

## OPERATOR COMFORT.

A quiet and spacious cab with a powerful HVAC system and rear view camera keep operators comfortable and productive. The premium seat, wide leg room near the joystick mounts, and overall machine balance provide a superior ride.



## PRESSURIZED COMPARTMENTS.

The machine is segmented into separate compartments that are pressurized to prevent debris from entering the machine. Perforated panels keep the machine components at cooler temperatures longer and along with heavy duty steel hinged belly pans reduce cleaning time.



## WORK ZONE VISIBILITY.

A clean three-piece front windshield and sleek hose routings allow the operator to see the work zone easily without having to strain or reposition the machine. This minimizes operator fatigue and leads to more productivity.



## GREATER DURABILITY & RELIABILITY.

Rugged frames with integrated steering cylinder mounts and a center hitch field-proven for nearly 20 years are built for the harshest applications. The large cooling system keeps the engine and hydraulics cool, extending component life.

# M860 SPECIFICATIONS

<b>Engine Model</b>	Cat® C9.3B Tier 4 Final	<b>Wheelbase</b>	125.0" 3175 mm	<b>Cutting Path - 624</b>	8' 0" 2.44 m
<b>Gross Power</b>	375 hp 280 kW	<b>Ground Clearance</b>	24.7" 627 mm	<b>Cutting Path - 825</b>	8' 4" 2.54 m
<b>Engine Speed</b>	1880 rpm	<b>Transport Width</b>	9' 11" 3.03 m	<b>Max Single Cut Diameter - 624</b>	8.0" 203 mm
<b>Weight</b>	38,450 lb 17 440 kg	<b>Transport Length</b>	29' 11" 9.12 m	<b>Max Single Cut Diameter - 825</b>	16.0" 406 mm
<b>Fuel Capacity</b>	130.5 gal 494 L	<b>Travel Speed (low)</b>	0-5.2 mph 0-8.4 km/h	<b>Max Mowing Diameter - 624</b>	4.0" 102 mm
<b>DEF Capacity</b>	11.8 gal 44.7 L	<b>Travel Speed (high)</b>	0-12.3 mph 0-19.8 km/h	<b>Max Mulching Diameter - 825</b>	16.0" 406 mm
<b>Hydraulic Tank Capacity</b>	30.4 gal 115 L				

Base configuration includes 30.5L-32 26PR tires, winch ready, and 825 mulching head.

## POWERTRAIN

- Cat C9.3B engine certified to EPA Tier 4 Final
- Primary and secondary fuel filters, including water separator
- Electric fuel priming pump
- Electric fuel transfer pump
- Centrifugal engine air pre-cleaner
- 2-Stage engine air cleaner
- Cross-flow cooling system with side by side cores
- Swing out air conditioner condenser
- Hydraulically driven, on demand reversing cooling fan
- Electronically driven, reversing pressurizing fan
- 2-Speed hydrostatic ground drive
- Momentary front axle differential lock
- On/off rear differential lock
- Heavy-duty driveshafts
- Lubed for life universal joints and greasable center driveshaft joint
- Spring applied, hydraulically released parking brake

## OPERATOR ENVIRONMENT

- Enclosed OPS/FOPS/ROPS certified cab
- Reverse slope 3-piece windshield
- High capacity HVAC system
- Pressurized water tank
- Air suspension seat with harness seat belt
- Joystick steering controls
- Weiler programming system
- Adjustable operator controls
- Attachment float control
- Road steer mode
- Creep mode
- Terrain selection mode
- AM/FM/Bluetooth Radio
- Backup camera with 10" screen
- 24V to 12V converter and two 12V power ports
- 2 Beverage holders

## SALES AND SERVICE

Sold and serviced exclusively through Weiler Forestry dealers worldwide

[WEILERFORESTRY.COM](http://WEILERFORESTRY.COM)

Materials and specifications are subject to change without notice.  
Featured machines and photos may include optional equipment. All rights reserved.

## HYDRAULICS

- PowerDirect Plus system
- Load-sense hydraulics
- Variable displacement pumps
- High performance, multi-functioning main control valve
- Long life, in-tank hydraulic filter
- Electric hydraulic oil fill pump

## ELECTRICAL

- 24-volt electrical system with two 12-volt batteries
- Main disconnect switch with Diesel Exhaust Fluid (DEF) purge indicator light
- Display monitor and programmable operator controls
- LED working lights

## OTHER STANDARD EQUIPMENT

- Heavy-duty double walled box section frames
- Rear mounted tow hooks
- Dual tapered roller bearing upper and lower center hitch
- Chrome plated lift arm and tilt pins
- Ecology drains (engine oil, engine coolant, hyd tank, fuel tank, axles)
- Tilt cab
- Under Cab Water Tank
- Pressurized engine, hydraulic, and Clean Emissions Module compartments
- Ground level fuel fill
- Single side engine service
- S-O-S sampling ports

## OPTIONAL EQUIPMENT

- Retrieval Assist Winch
- Strobe, Turn Signals & Brake Lighting
- Water Tank Fill w/RV Antifreeze Mix
- CB Radio
- Product Link™ (PL243 Cellular or PL631 Satellite)
- Fire Extinguisher
- Attachment Quick Coupler Connections
- 28L x 26 Tires - Overall Width 117.0" (2970 mm)
- 30.5L x 32 Tires - Overall Width 119.1" (3025 mm)
- 67 x 34 Tires - Overall Width 128.7" (3270 mm)
- 624 Brushcutter
- 825 Mulcher

## WARRANTY

12 months standard, extended warranty available

M860, SS (04-2021)